

Approved for use in Miami-Dade HVHZ Zones Florida Building Code Approved Product Approval FL 17838 www.euro-wall.com



FOLDING | SLIDING | STACKING

888.989.EURO (3876)

SPECIFICATIONS

EURO VISTA FOLD™ ALUMINUM DOOR SYSTEM

Maximum / Minimum Specifications

	Max Panel Weight:	330 lbs each panel
	Min Panel Width:	18"
	Max Panel Width:	52"
	Min Panel Height:	32"
	Max Panel Height:	144"
	Door Thickness:	2-1/4"
	Max # of Panels:	Unlimited

NOTE: When using maximum panel widths & heights, panels may exceed maximum panel weight of 330 lbs. Calculated weight check should be done. For installations in Florida, see the Florida Product Approval.

Extrusions

Extruded Aluminum 6063-T5.

Extrusion Finishes:

- 1. Clear anodized Class 1.
- 2. Standard Mill Finish available for custom colors from Euro-Wall.
- 3. White and bronze Kynar Coat finish: D2000-AAMA 2605.
- 4. Custom Powder Coat finishes available D3000-AAMA 2604 and 2605.
- 5. Interior wood finish.

Hardware

Stainless Steel (316/304SS) Components with Aluminum hinges.

Twinnoint Hardware

Stainless Steel (304SS) & Aluminum Components.

Lever Lock Sets

Bronze, Brushed Satin or Polished Stainless Steel.

DSD Multi-point Door Locks:

Faceplate, latch and hooks are 304SS.

Euro-Wall 10 Year Warranty

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years from the date of purchase.

3 STANDARD FRAME & DOOR PANEL FINISHES




- Anodized, Powder Coat or Kynar[®] are available
- 40 Custom Wood Grain finishes available (not shown)
- Custom Powder Coat finishes available (not shown)
- Manufacturer color match options



Interior Wood Clad Option


FEATURES OF THE EURO VISTA FOLD™ DOOR SYSTEM

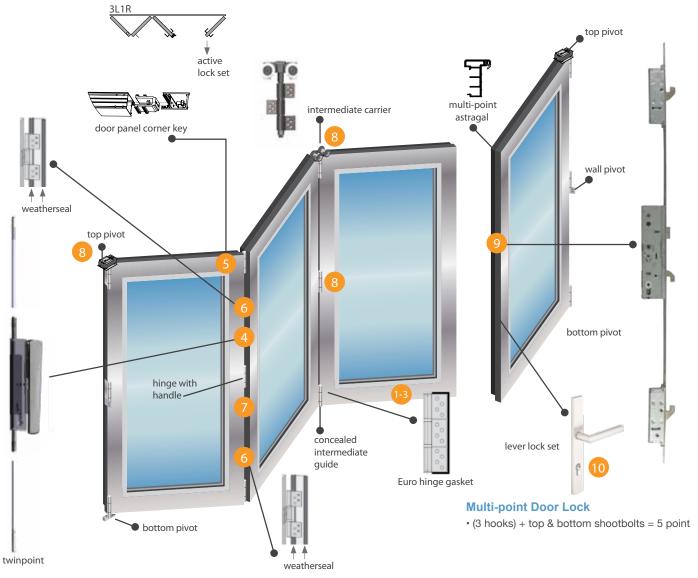

- 1 Segmented, straight or radius door options available
- 2 90 degree postless corner unit option available
- 3 Door panels designed for IG, laminated impact and IG impact glass
- 4 Twinpoint hardware in stainless steel (304SS)
- 5 Door panel corner key for strength and security
- 6 Weatherstripping on all door panels and frames
- 6063-T5 aluminum profiles in all Euro extrusions
- 8 Stainless steel lever lock set
- 9 Stainless steel (304SS) 5 or 6 point MK2 multi-point door lock
- Optional matching OEM hardware handles



OPTIONS



Twinpoint assembly is used in securing each pair of folding door panels in the closed position.



Bronze & Brushed Stainless Steel (White Option Not Shown)

FINISH OPTIONS







NOTE: The colors shown in this brochure give only an approximation of color and finish. Actual colors and finishes may vary.

SUPERIOR BY DESIGN


FOLDING DOOR PANEL OPTIONS



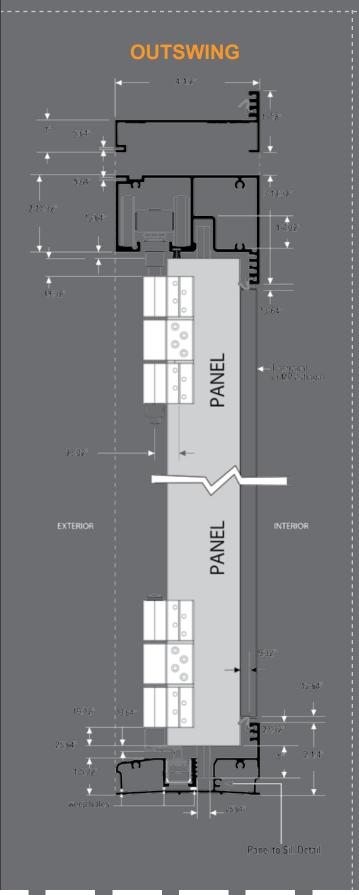

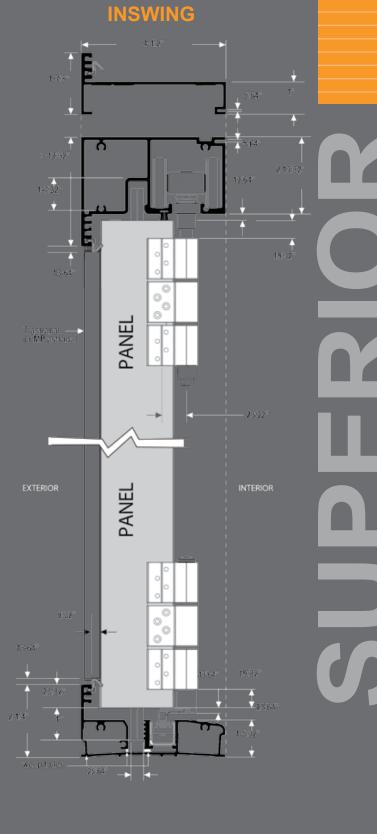

EURO VISTA FOLD™ GLAZING DETAILS

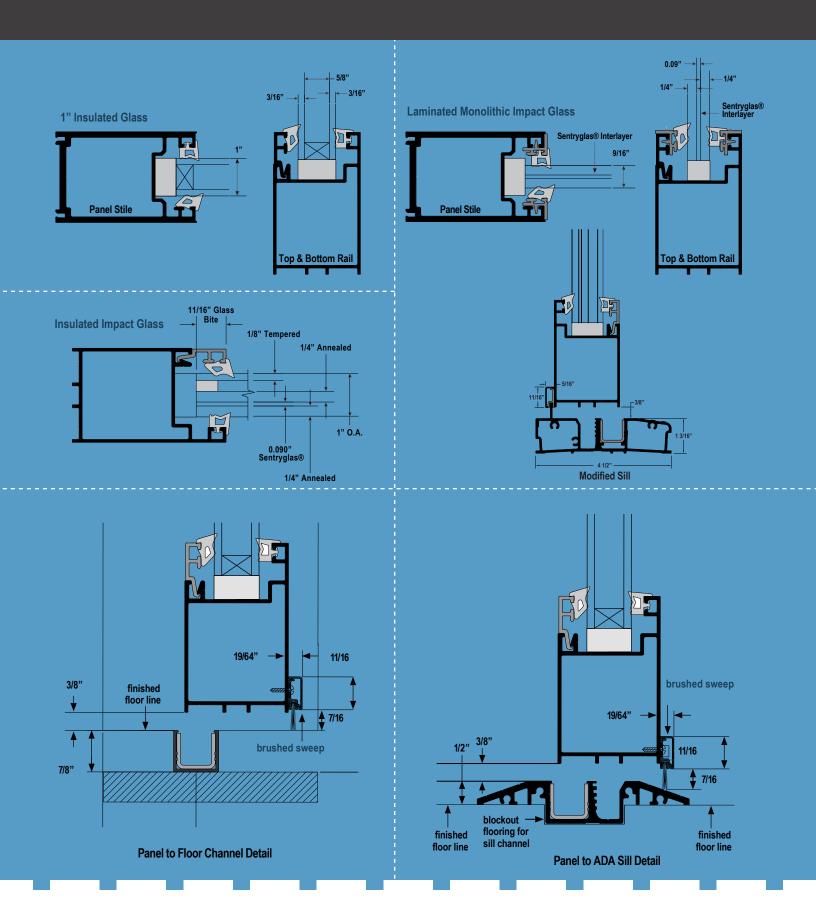







TEST PERFORMANCE

Approved for use in Miami-Dade HVHZ Zones
Florida Building Code Approved
Product Approval FL 17838
TAS 201 TAS 202 TAS 203

AAMA / WDMA / CSA 101 / I.S.2 / A440-08 · NAFS-08

Air Infiltration: A2

Water Leakage Resistance: DP75 or PG75 Wind Load Resistance: DP70 to DP100

Wind Zone 4 (Hurricane) ASTM (cycling) E1996: DP100 (C3 H100 Series) Wind Zone 4 (Hurricane) ASTM (impact) E1886: Pass (C3 H100 Series)

euro-wall*

FOLDING | SLIDING | STACKING 888.989.EURO (3876)

Euro-Wall Systems, LLC • 24100 Tiseo Blvd • Port Charlotte, FL 33980 www.euro-wall.com • info@euro-wall.com

Proud Member of the American Architectural Manufacturers Association.

