



Approved for use in Miami-Dade HVHZ Zones Florida Building Code Approved Product Approval FL 34003

www.euro-wall.com 888.989.EURO (3876)





## Unlike any other impact rated multi slide door on the market.

The Euro Vista Multi Slide™ is unlike any other impact rated multi slide door. The panel interlock, at less than 1", is the slimmest sight line profile available providing the largest views and the maximum panel to glass ratios. Impact panels can span heights up to 14' and widths up to 7' all while maintaining an impact rating for inclement weather areas. These massive panels glide open and close effortlessly thanks to the patented EZ Glide™ roller system. The sill can be embedded flush with the finish floor and can meet water ratings without the need of a sill riser. The Euro Vista Multi Slide™ is a truly unique sliding door system and provides consumer benefits that cannot be found anywhere else.

Less than 1" Interlock Sight Line Profile

Impact Rated

Panel Heights up to 14'

Panel Widths up to 7'

Flush Embedded Water Rated Sill



## SYSTEM THRESHOLDS

## **Maximum / Minimum Specifications**

| Max Panel Weight: | 800 lbs / panel |
|-------------------|-----------------|
| Max Panel Height: | 168"            |
| Max Panel Width:  | 84"             |
| Min Panel Height: | 32"             |
| Min Panel Width:  | 24"             |
| Panel Thickness:  | 1 3/4"          |
| Max # of Panels:  | 8               |
|                   |                 |

**NOTE:** When using maximum panel widths & heights, panels may exceed maximum panel weight of 800 lbs. Calculated weight check should be done. For installations in Florida, please see the Florida Product Approval for usage and limitations.

## SYSTEM HIGHLIGHTS

## Thinnest Profile on the Market

Interlocking panels have a sight line profile width of less than 1" providing the largest uninterrupted view available from any impact rated multi slide on the market

## Water Rated Flush Sill - No Sill Riser

Flush track with finished floor - enjoy the security of a HVHZ water rating without 2", 3" or 4" risers

## FI 34003

Tested for use in Miami-Dade and Florida HVHZ Zones

## **Up to 8 Panels with Pocket Option**

Up to 8 panels in any direction - pockets approved with all configurations

## **Extrusions**

Extruded aluminum 6063-T5 with door panel corner keys provide industry leading strength and security

## **Handle Hardware**

Stainless steel components with corrosion resistant material - salt spray tested 500 hours

## Value Engineered

Value engineered to offer the highest quality with reasonable pricing

## **Largest Impact Rated Panel Sizes**

Enjoy large uninterrupted views with Florida Product Approved panels (up to 14' heights and 7' widths)

## Aasthatics

Wood cladding option available

## **Long Lasting Finish**

Standard finish coating is AAMA 2605, the highest quality finish available

## **Thermal Requirements**

Tested for thermal requirements for both residential and commercial usage

## **Easy Operation**

The EZ Glide™ Roller System and anti-slam hardware makes the Euro Vista Multi Slide™ safe and effortless to operate

## LESS THAN 1" SIGHT LINE PROFILE

## The Euro Vista Multi Slide™ interlock (where the panels join when the door system is closed) has a PROFILE WIDTH OF LESS THAN 1". This provides the largest uninterrupted view on the market for any impact rated multi slide door system.



## EMBEDDED TRACK DETAILS

The Euro Vista Multi Slide™ sill/track can be **fully embedded** with a **low profile** configuration. The hidden track option allows optimal threshold clearance and creates a clean seamless interior / exterior sight line.

For weather challenged climates, the flush and low profile hidden track systems can be manufactured to meet water rating specifications without a sill riser. Additionally, Euro-Wall EXCLUSIVELY manufacturers a water rated hidden flush sill.

# EMBEDDED SILL & PANEL CROSS SECTION DETAIL Optional track inlay to create flush transitions Finished Floor

## PANEL FINISH OPTIONS

## STANDARD FRAME & DOOR PANEL FINISHES



AAMA 2605



Class I







Black AAMA 2605

## **STANDARD FRAME & DOOR PANEL FINISHES**

- Powder coat or Kynar<sup>®</sup> finishes available
- Custom powder coat or Kynar® finishes available
- · Manufacturer color match options
- · Custom wood grain finishes available

## INTERIOR WOOD CLAD FINISH OPTION

- Mahogany / sapele
- · White oak
- · Additional wood species available

## HARDWARE / HANDLE FINISH OPTIONS


## LADDER PULL



LOCKING LEVER



SILL / TRACK



Available Finishes

Brushed Satin Polished Stainless Steel White Bronze

\*Standard finish brushed satin, others finishes subject to additional costs

Black

Available Finishes

**Brushed Satin** 

White

Bronze Black

Custom Colors Available

Available Finishes

**Clear Anodized** 

White

**Bronze** 

**Black** 

Custom Colors Available


## **GLAZING OPTIONS**

- 1 1/4" Impact Insulated Glass
- 9/16" Monolithic Impact Glass

## SUPERIOR BY DESIGN

©2024 Euro-Wall, LLC • www.euro-wall.com

## CONFIGURATION SAMPLES

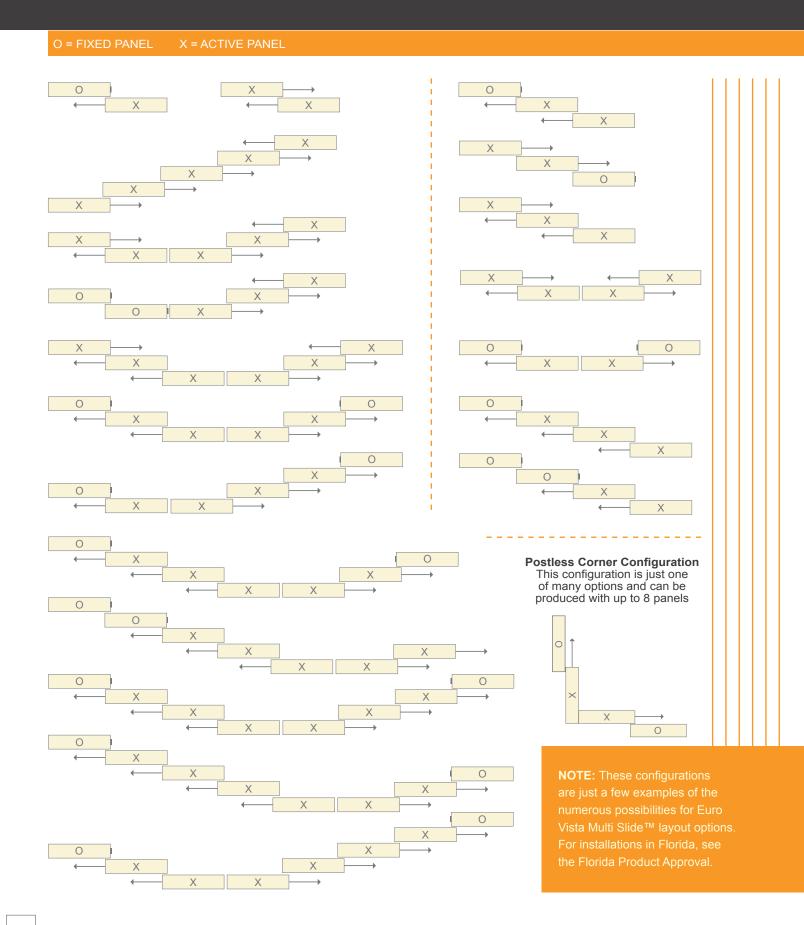

## TEST PERFORMANCES

- Approved for use in Miami-Dade HVHZ Zone
- Florida Building Code Approved Product Approval FL 34003
- —— AAMA 440 PASS
- □ ASTM E1300 PASS
- —□ NAFS 08 PASS

- ──□ WDMA/CSA101 PASS
- —□ Up to DP120
- Tested for use in Florida
- —\_\_ lmpact 1886 & 1996
- —□ TAS 201, 202, 203 (Miami Dade)

## DESIGN PRESSURE CHART


WZ3
Panel Width (Inches)

|          |     | 45    | 48    | 51    | 54   | 57    | 60   | 63   | 66   | 69   | 72   | 75   | 78  | 81  | 84  |
|----------|-----|-------|-------|-------|------|-------|------|------|------|------|------|------|-----|-----|-----|
|          | 90  | 120   | 120   | 120   | 120  | 120   | 120  | 120  | 120  | 120  | 120  | 120  | 120 | 120 | 119 |
|          | 96  | 120   | 120   | 120   | 120  | 120   | 120  | 120  | 120  | 120  | 120  | 120  | 108 | 107 | 106 |
| s)       | 102 | 120   | 120   | 120   | 120  | 120   | 120  | 120  | 120  | 120  | 101  | 99   | 98  | 97  | 95  |
| he       | 108 | 120   | 120   | 120   | 120  | 120   | 120  | 120  | 120  | 95   | 93   | 91   | 89  |     |     |
| (Inches) | 114 | 120   | 120   | 120   | 120  | 120   | 120  | 120  | 89.6 | 87.3 | 85.3 | 83.5 |     |     |     |
| ht (     | 120 | 120   | 120   | 120   | 120  | 120   | 120  | 85.9 | 83.4 | 81.2 | 79.2 |      |     |     |     |
| Height   | 126 | 120   | 120   | 117.6 | 112  | 107.1 | 83.1 | 80.4 | 78   |      |      |      |     |     |     |
| I        | 132 | 113.7 | 107.3 | 101.7 | 96.8 | 81.2  | 78.2 | 75.6 |      |      |      |      |     |     |     |
| Panel    | 138 | 99.1  | 93.5  | 88.5  | 79.9 | 76.7  | 73.9 |      |      |      |      |      |     |     |     |
| Ъ        | 144 | 87.6  | 83.1  | 79.2  | 75.8 | 72.7  | 70   |      |      |      |      |      |     |     |     |
|          | 150 | 79.8  | 75.2  | 71.1  | 67.6 | 64.4  |      |      |      |      |      |      |     |     |     |
|          | 156 | 70.7  | 66.6  | 63    | 59.8 |       |      |      |      |      |      |      |     |     |     |
|          | 162 | 63    | 59.3  | 56.1  |      |       |      |      |      |      |      |      |     |     |     |
|          | 168 | 56.4  | 53.1  | 50.2  |      |       |      |      |      |      |      |      |     |     |     |

HVHZ Panel Width (Inches)

|                      |     | 45    | 48    | 51    | 54    | 57    | 60   | 63   | 66   | 69   | 72   | 75   | 78  | 81  | 84  |
|----------------------|-----|-------|-------|-------|-------|-------|------|------|------|------|------|------|-----|-----|-----|
| anel Height (Inches) | 92  | 120   | 120   | 120   | 120   | 120   | 120  | 120  | 120  | 120  | 120  | 120  | 120 | 115 | 114 |
|                      | 96  | 120   | 120   | 120   | 120   | 120   | 120  | 120  | 120  | 120  | 120  | 120  | 108 | 107 | 106 |
|                      | 100 | 120   | 120   | 120   | 120   | 120   | 120  | 120  | 120  | 120  | 120  | 103  | 101 | 100 | 99  |
| he                   | 104 | 120   | 120   | 120   | 120   | 120   | 120  | 120  | 120  | 120  | 98   | 96   | 95  | 94  |     |
| Inc                  | 108 | 120   | 120   | 120   | 120   | 120   | 120  | 120  | 120  | 94.4 | 92.4 | 90.6 | 89  |     |     |
|                      | 112 | 120   | 120   | 120   | 120   | 120   | 120  | 120  | 91.8 | 89.5 | 87.5 | 85.7 |     |     |     |
| eig                  | 116 | 120   | 120   | 120   | 120   | 120   | 120  | 89.9 | 87.4 | 85.1 | 83.1 |      |     |     |     |
| I                    | 120 | 120   | 120   | 120   | 120   | 120   | 120  | 85.9 | 83.4 | 81.2 | 79.2 |      |     |     |     |
| ane                  | 124 | 120   | 120   | 120   | 117.8 | 112.6 | 84.9 | 82.2 | 79.7 | 77.5 |      |      |     |     |     |
| Ğ                    | 128 | 120   | 118.1 | 112   | 106.6 | 84.4  | 81.4 | 78.8 | 76.4 |      |      |      |     |     |     |
|                      | 132 | 113.7 | 107.3 | 101.7 | 96.8  | 81.2  | 78.2 | 75.6 |      |      |      |      |     |     |     |
|                      | 136 | 103.7 | 97.8  | 92.7  | 81.3  | 78.1  | 75.3 | 72.7 |      |      |      |      |     |     |     |
|                      | 140 | 94.8  | 89.4  | 84.7  | 78.5  | 75.3  | 72.5 |      |      |      |      |      |     |     |     |
|                      | 144 | 87.6  | 83.1  | 79.2  | 75.8  | 72.7  | 70   |      |      |      |      |      |     |     |     |
|                      |     |       |       |       |       |       |      |      |      |      |      |      |     |     |     |

©2024 Euro-Wall, LLC • www.euro-wall.com

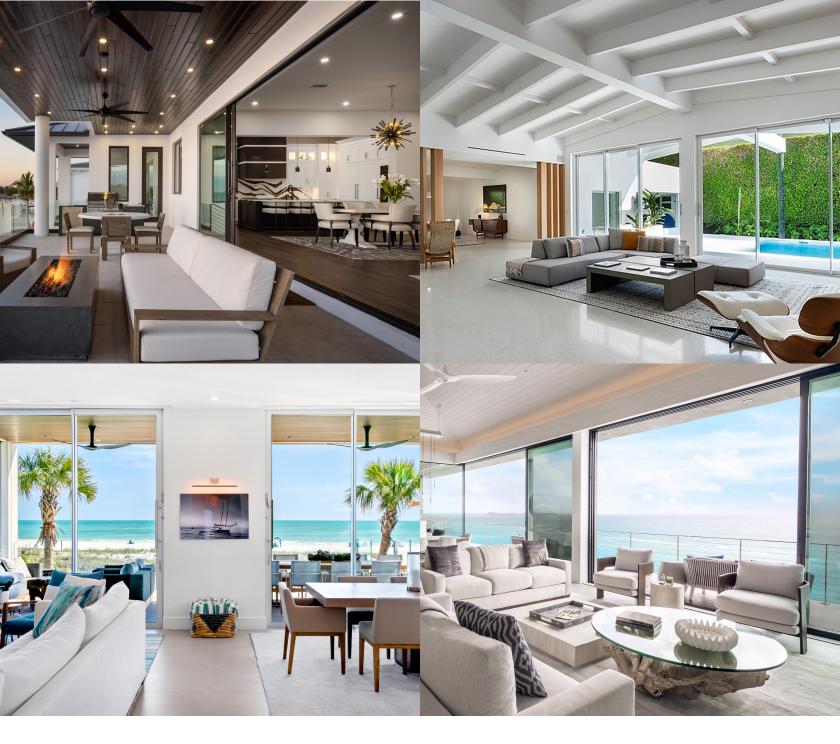

## **EURO-WALL 10 YEAR WARRANTY**

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years from the date of purchase.

888.989.EURO (3876) W W W . e u r o - w a l l . c o m

## **MANUFACTURING**

2200 Murphy Court North Port, Florida 34289 888.989.3876 • 941.979.5316

## euro-wall

FOLDING | SLIDING | STACKING | PIVOT

## **SHOWROOM**

1211 Stirling Road, Unit 102, Dania Beach, Florida 33004 941.979.5316

Proud Member of the American Architectural Manufacturers Association.

